


SEIKO


A、B、BE TYPE CAM SWITCH



A TYPE

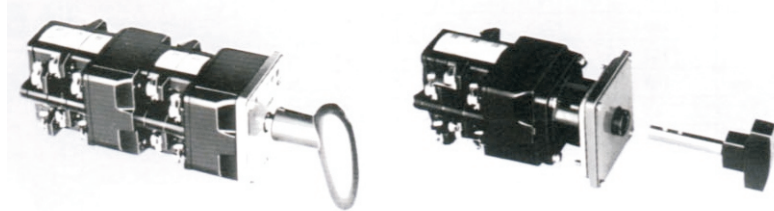

B TYPE

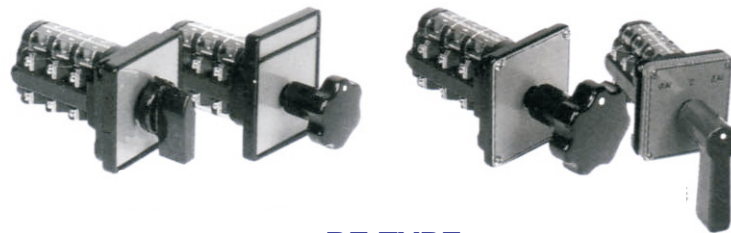

BE TYPE

● SPECIFICATION

MODEL		A TYPE	B、BE TYPE
STANDARD		JISC4520、JISC4522 (※BS4794)	
OPERATION TEMP		-20°C ~60°C	
HUMIDITY		45%~85%	
ISOLATION VOLTAGE		AC/DC 600V	
RUSH CURRENT		20A	16A
CONTACTOR RESISTANCE		UNDER 50m Ω	
ISOLATION RESISTANCE		OVER 100M Ω	
DIELECTRIC VOLTAGE		AC 2500V 1 MIN.	
IMPULSE VOLTAGE		7000V 1.2/50μs	
L I F E	MACHINERY		OVER ONE MILLION TIMES
	ELECTRICAL	AC	750,000 (OVER)
		DC	250,000 (OVER)
VIBRATION		2G	
IMPULSE		50G	
VIEW OF CONTACTOR		CLEARLY TO SEE THROUGH PROTECTOR COVER	

ORDER FORM



ORDER CODE	CONTENT
A	A TYPE
B	B TYPE
E	E TYPE

ORDER CODE	CONTENT
N	MENU OPERATION
R	SPRING RETURN
NR2	LEFT MENU /RIGHT NATURE
NR8	RIGHT MENU/LEFT NATURE
NK	MENU OPERATION W / KEY
RK	SPRING RETURN W / KEY

ORDER CODE	CONTENT
	NONE
PL	PULL & MENU OPERATION
PF	PUSH & MENU OPERATION
SL	PULL & NATURE OPERATION
SF	PULL & SPRING RETURN
K	KEY TYPE

ORDER CODE	CONTENT
	NONE
1	NO. OF OPERATION POSITION
2	
3	
4	
5	
6	
7	
8	
0	PUSH & PULL FOR EVERY POSITION INCLUDING KEY HANDLE

ORDER CODE	HANDLE
Y	NEEDLE
F	FUNNEL
Q	RECTANGLE
R	FLOWER
V	NO BALL
S	STICK
P	PISTOL
MY	
AR	
AV	
AS	
AP	
B	BUTTON
G	BALL

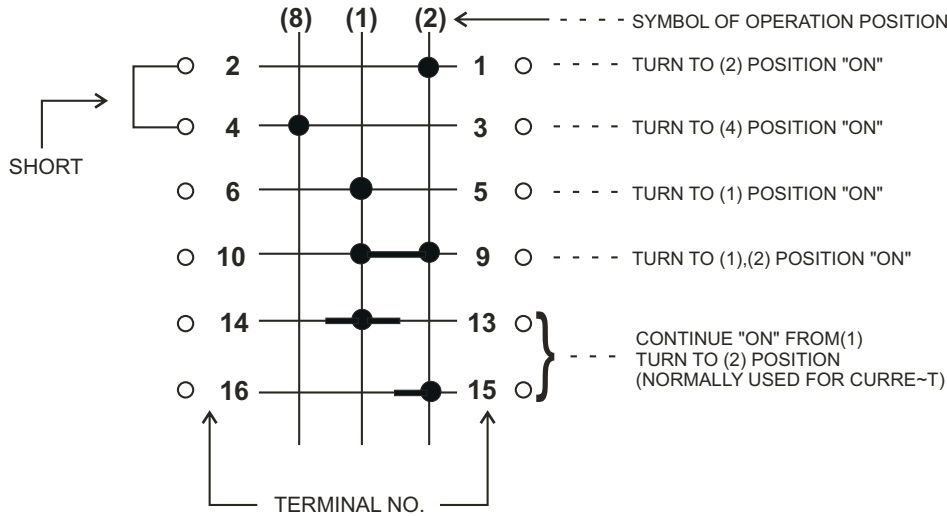

ORDER CODE	CONTENT
K	BLACK
M	GREEN
R	RED
T	BROWN

ORDER CODE	CONTENT
K	BLACK

PANEL THICKNESS (1.6~4.5mm)

HANDLE		Y	F	Q	R	V	S	P	B	Q
KIND	SHAPE									
	A				R	V	S	P	B	G
	B	Y	F	Q	R	V	S	P	B	G
	AB				AR	AV	AS	AP		
	E · BE	Y	F	Q	R	V	S	P		
	ME	MY								
	H · BH	Y			R					
	AH · AE				AR	AV	AS	AP		

MODEL NO	ANGLE	HANDLE	NAME PLATE	CONNECTION FIGURE
BHN-A (A.S 3 ∅ 3W2CT)	45°		AMMETER R S T ○ ○ ○	
BEN-3AC (A.S 3 ∅ 3W3CT)	90°		AMMETER O T ○ R S	
BEN-3AN (A.S 3 ∅ 4W)	45°		AMMETER R S T O ○ N	
BHN-V (V.S 3 ∅ 3W)	45°		VOLTMETER R-S S-T T-R 0 ○ 0	
BEN-3VC (V.S 3 ∅ 4W)	45°		VOLTMETER R-S ○ R-N C S-T ○ S-N T-R T-N	
AR-10 BER-10 } BER-40 AR-40	45°		OFF ON ○	
BEN-C201 } BEN-C206	45°		OFF ON ○	
BEN-C301 } BEN-C306	45°		OFF ON ○	
ARSF1-10 BRSF1-10 } BRSF1-40 ARSF1-40	45°		OFF ON ○	
AR-1011 BR-1011 (附殘留接點)	45°		OFF ON ○	
ARSF1-1011 BRSF1-1011 (Pull & Turn 附殘留接點)	45°		OFF ON ○	
AN-2AB AS 3 ∅ 3W2CT	45°		AMMETER R S T ○ ○ ○	
AN-4A AS 3 ∅ 3W3CT	90°		AMMETER O T ○ R S	
AN-3AN AS 3 ∅ 4W	45°		AMMETER R S T O ○ N	
AN-2V AS 3 ∅ 3W	45°		VOLTMETER R-S S-T T-R 0 ○ 0	
AN-5VN AS 3 ∅ 4W	45°		VOLTMETER R-S ○ R-N C S-T ○ S-N T-R T-N	